PROJECT NUMBER	SHEET NO.
	1 OF 2

BLOCK 36, KENWOOD PARK
PROPOSED SEWER EXTENSION
CITY OF SUPERIOR, WISCONSIN

REVIEWED AND APPROVED BY THE DIV. FOR ENVIRONMENTAL QUALITY, DEPT. OF NATURAL RESOURCES IN ACCORDANCE WITH SEC. 144.04 WIS. STATS. SUBJECT TO THE CONDITIONS SET FORTH IN THE LETTER OF APPROVAL
APPROVAL NUMBER 94-0510
APPROVAL DATE 05-02-94

APPROVED FOR CITY OF SUPERIOR
DATE

WILLIAM R. NIEMI P.E.

RECEIVED-DNR
APR 13 1994
DIVISION OF WASTEWATER MGMT.

WEST SUPERIOR

NINETEENTH DIVISION

KENWOOD PARK ADDITION

BLOCK 466

BLOCK 451

BLOCK 36

BLOCK 35

NORTH 24th. STREET (UNIMPROVED) ℄

125'

35'

35'

ORIGIN OF LEVELS
NAIL IN POWER POLE
STA. 7 + 95 — 5' RT.
ASSUMED ELEV. 650.00

STA. 4+85.5
MANHOLE IN PLACE
COVER ELEV. 651.13
INVERT ELEV. 643.57 (INLET)

GEOTEXTILE SILT FENCE REQD

GEOTEXTILE SILT FENCE REQD.

STA 8+48
4" DIA. LATERAL REQD.
10' LENGTH

OHE

5+0 6+0 7+0 8+0 9+0 10+0

+03 +00 +00

P.V.C. 8" SANITARY SEWER
STA. 4+87.7 TO 8+83.5 = 396 L.F. #5 C.Y. GRANULAR BACKFILL REQD.
STA. 8+85.5 1 MANHOLE REQD.
8" X 4" WYE — 1 REQD. STA. 8+48
4" DOW STYROFOAM 115 BRAND HIGH LOAD 2572 SQ FT
SILT FENCE
STA 5+50 TO 7+70 LT 220 L.F.
5+50 TO 7+70 RT 220 L.F.
8+00 TO 9+00 LT & RT 200 L.F.
9+00 ℄ 50 L.F.

NOTE: ALL DISTURBED AREAS SHALL BE TOPSOILED, FERTILIZED AND SEEDED IMMEDIATELY UPON COMPLETION OF SEWER INSTALLATION.

STA. 8+85.5
CONST. MANHOLE
DISCH. ELEV. 645.17
COVER ELEV. 651.00

FINISHED GRADE

EXISTING GROUND

← 0.40%

8" P.V.C. SEWER PIPE

EXISTING 8" SAN. SEWER

652 650 648 646 644 642 640

49.0 46.5 46.6 44.5 44.9 44.3 46.1 46.8 44.3 44.2 45.7 47.9 49.3 49.5 49.0 47.5 46.6 40.1 34.2

5 6 7 8 9 10

+86 +13 +28 +39 +76 +09 +22 +42 +68 +17 +00

LOCATION SKETCH

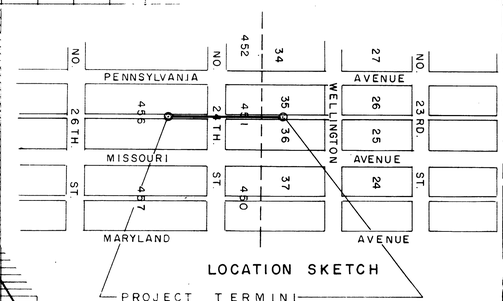

PROJECT TERMINI

Cat No 2130 – D140